


# Linear Solenoids


## Frame Solenoids – Standard

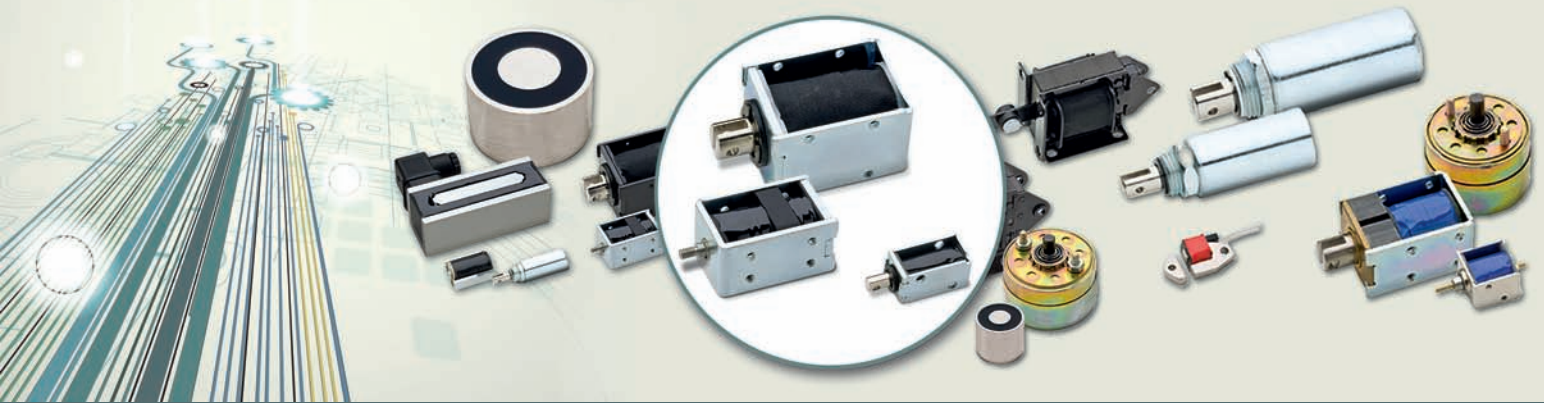


*Middle Frame / Adequate for Overload / Extreme Solid*

**STSS-818208**

### Type

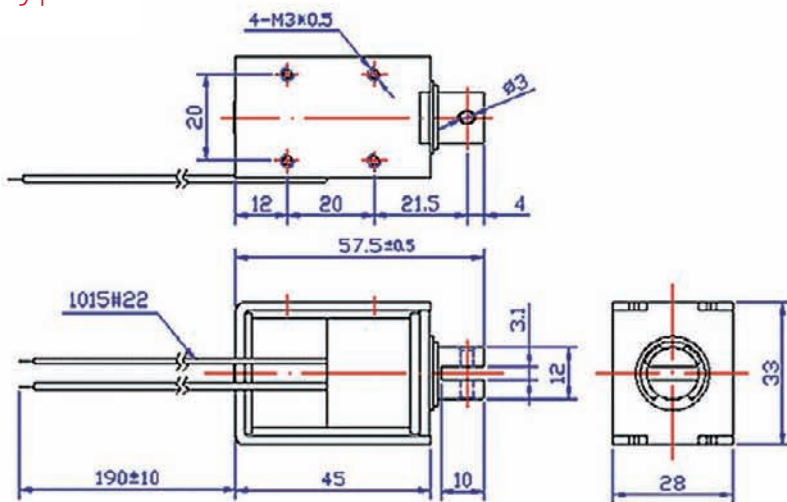

### Force-stroke-diagram (N/mm)

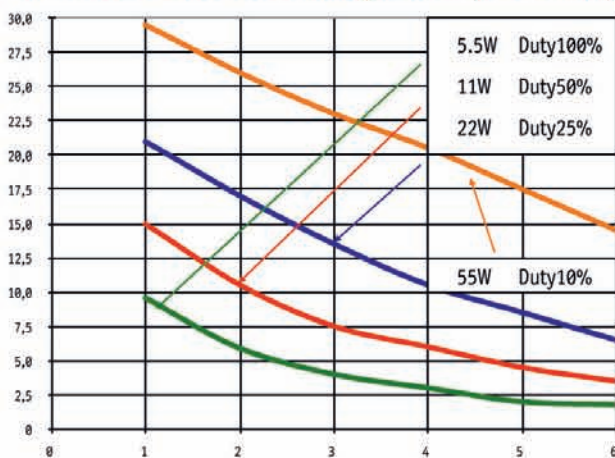

### Description

Cheap and light-weight based on frame mode construction. Including damping ring and dumper inside the case. Open framed solenoid with closed brace.

Small but with overload passably stroke at the 8-18 mm.

Weight: 208 g

Very high force at the end of the stroke.

### Coil Data

Relative Duty Cycle (%)	100	50	25	10
Max. Performance (Watt)	5,5	11	22	55
Max. Duty Cycle (sec.)	∞	140	50	9

### Solenoid Model

Version:

Pull magnet

Pressure Solenoid with spring return

Current:

12 VDC (standard)

24 VDC (standard)

Please ask for other options.

### Special Development On Request

Please contact us for your custom designed part (frame, force, special application, etc.)



**SHENG TENG GmbH**

VAT-ID: DE 271 696 661

General Manager:

Silvio Bruske / Frank Loeffler

District Court Munich reg. # HRB185777

Angerbrunnenstraße 11

D-85356 Freising

GERMANY

Phone: +49-8161-986 44 84

Fax: +49-8161-986 44 74

eMail: office@shengteng.de

**www.shengteng.de**